

OVERVIEW

The 5204 electromagnet is a projected field magnet providing field of any orientation at a location above the magnet surface. It is intended for applications where the space around the working volume needs to be freely accessible.

Custom pole extensions may be located on the pole faces in order to achieve desired field properties for a specific application. The 5204 can be mounted in any orientation and the light weight (1.5kg) allows the magnet to be integrated into dynamic applications such as wafer testing.



FEATURES

- Projected vector field up to 0.3T
- Interchangeable pole extensions
- Small and light weight
- Any mounting orientation
- Up to 200 Hz operation

APPLICATIONS

- Spintronic Devices
- Hall Effect Studies
- Magneto-Optical Studies

Revised 26 April 2015


GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com

| MODEL 5204 GENERAL SPECIFICATIONS | |
|------------------------------------|---|
| Peak operating field | Br=±300mT, Bz=±100mT |
| Axial viewing port | Ø5mm |
| Dimensions | 70mm W x 70mm D x 64.5mm H (2.76 inch w x 2.76 inch D x 2.54 inch H) |
| Weight (excluding hoses and water) | 1.5 kg (3.3 pounds) |

| Coils (3 coils per magnet) | |
|---------------------------------------|-------------|
| Resistance (20°C) | 39.4 mΩ |
| Max. Resistance (80°C) | 51.4 mΩ |
| Max. continuous current | 62A |
| Max. peak current | 100A |
| Max. continuous Power | 200 W/coil |
| Max. Peak Power | 515 W/coil |
| Coil Inductance | 175 μH/coil |
| Water Cooling (supply 18°C @ 60 psid) | 4 Litre/min |
| Anticipate max. sinusoidal frequency | 200 Hz |
| Over Temperature Interlock | 80°C |


| Bipolar Power Supply | DC OUTPUT RANGE | | Power (W) |
|----------------------|----------------------------|----------------------------|-----------|
| | Voltage (V _{DC}) | Current (A _{DC}) | |
| BOP 20-20M | 0 to ±20 | 0 to ±20 | 400 |
| BOP 20-50M | 0 to ±20 | 0 to ±50 | 1000 |

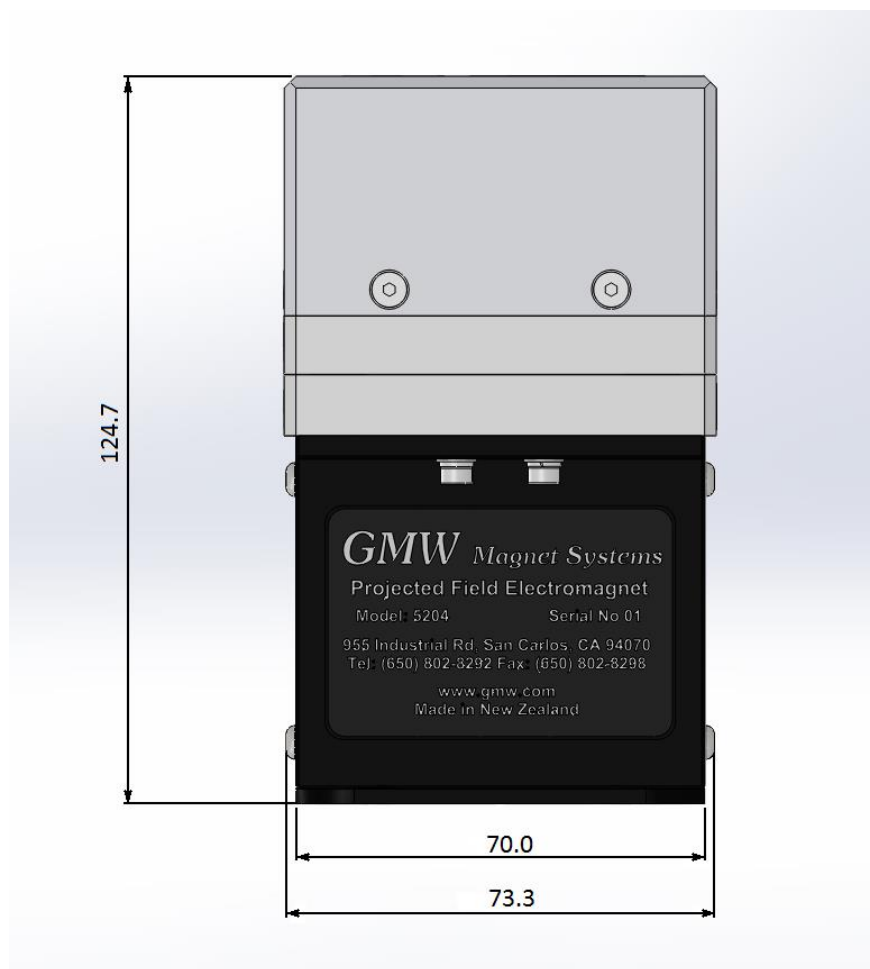

Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com

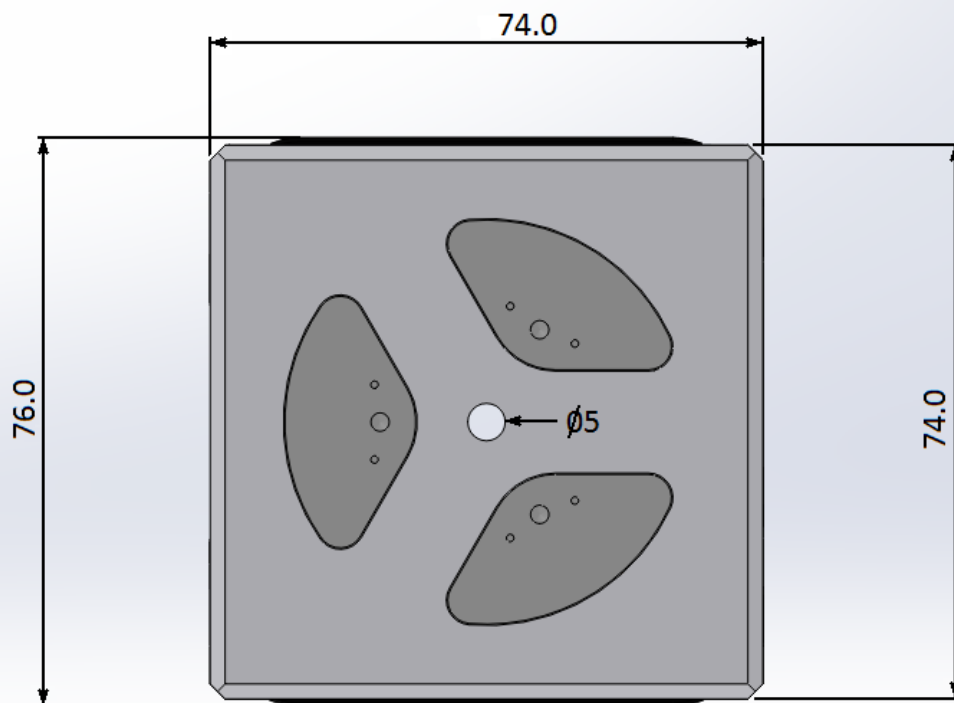

Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com


Pole Configuration 1:

Magnet with Condenser Plate




The magnet is fitted with a condenser plate and the excitation curves for each of the three coils are calculated to provide a rotating field of 106 mT in plane at 5mm above the condenser plate. The field rotates at 200 Hz with very low ripple (~ 0.5 mT) and < 0.1 mT of B_z component.

Excitation Curves for the Bz and Br fields at 4mm above the Pole Faces

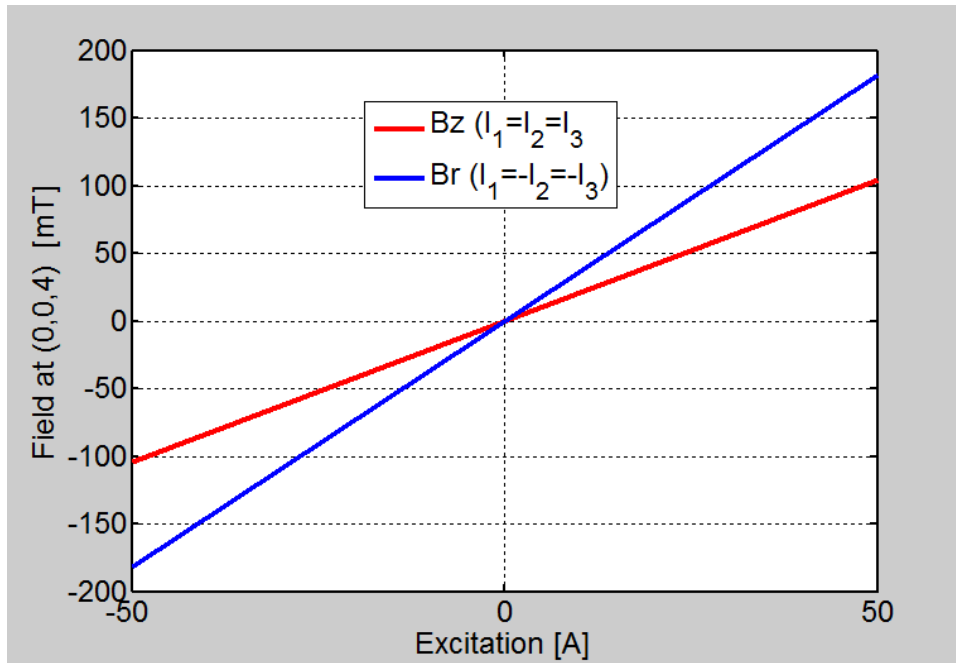


Field Strength Versus Height above Magnet (60A operation)

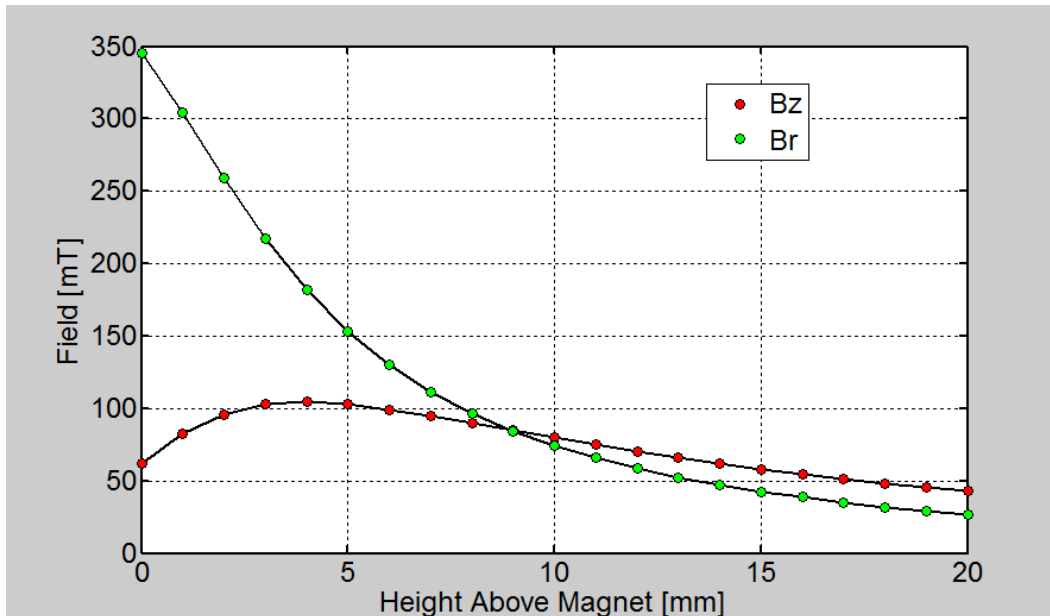

Revised 26 April 2015


Field Uniformity on a \varnothing 2mm Disc Versus Height Above Magnet

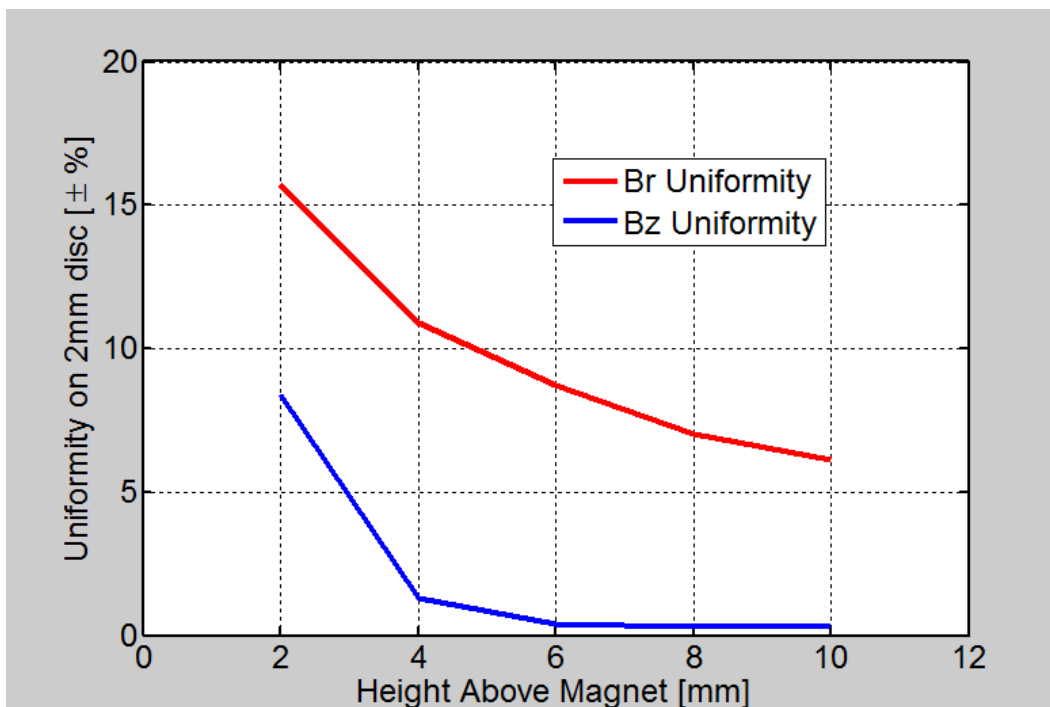


Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com

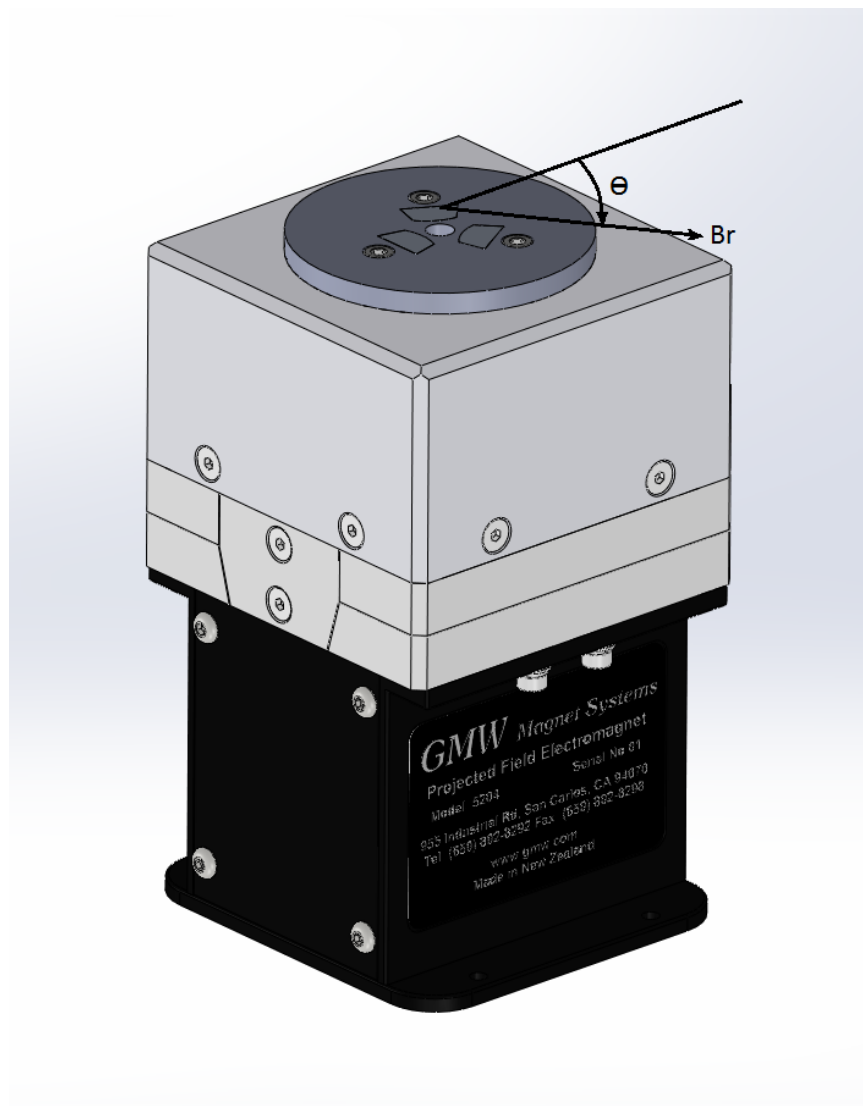

Field is measured at 5mm above top of condenser plate.

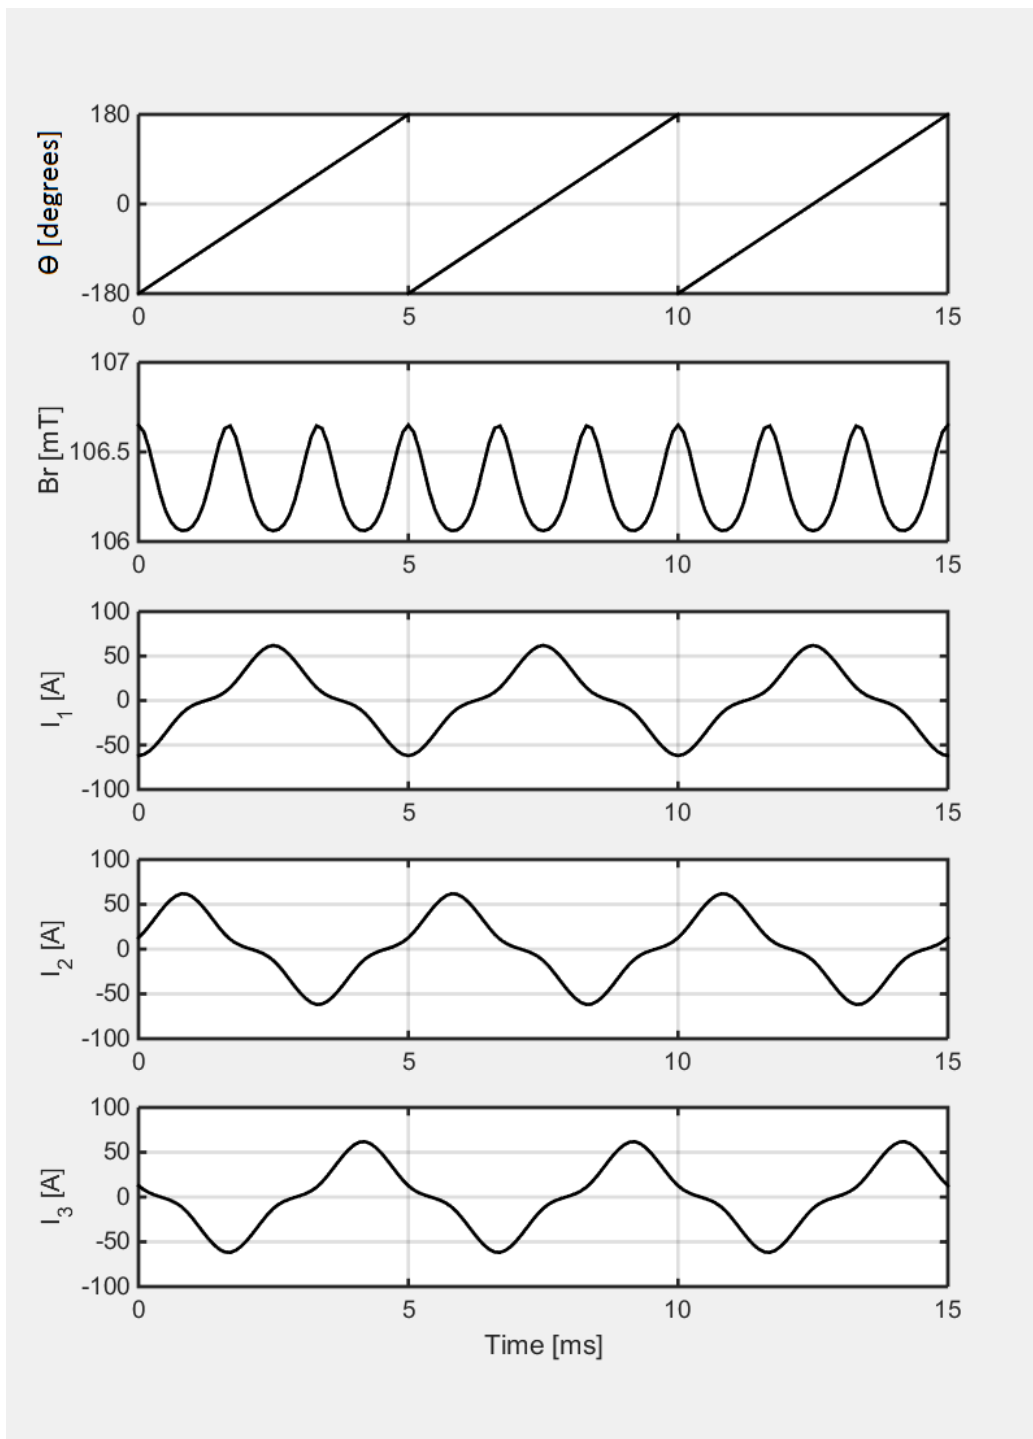

Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com

Pole Configuration 2:

Custom Poles for Increased In-Plane Field




The custom designed pole tips create increased field over 1mm³ volume. Pole tips are optimized as per customer requirements. Field is measured at 1mm above top of pole tips.

Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com

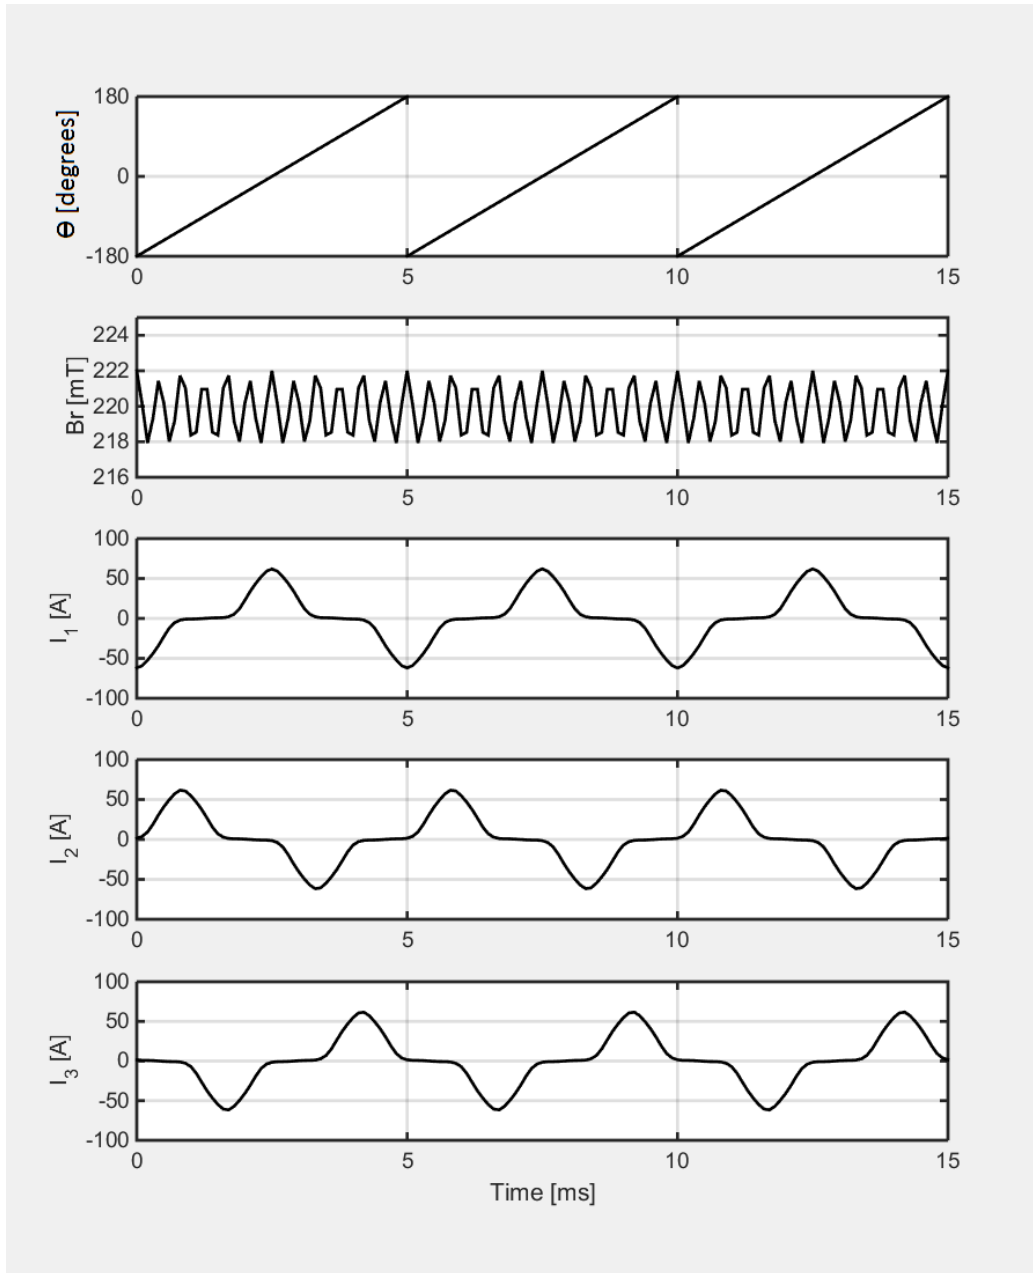

Revised 26 April 2015

GMW Associates • 955 Industrial Road • San Carlos, CA 94070 • USA

Tel +1 (650) 802-8292 • Fax +1 (650) 802-8298 • sales@gmw.com • www.gmw.com