

Angular Position Sensing (EM-3241) (Preliminary Specification)

All values specified in this data sheet are target specifications and are not guaranteed. The specifications are subject to change without notice.

Features


- Angular position sensing with Hall effect device
- Non contact rotation angle sensing by coin shape magnet and magnetic sensing IC
- Very small package with good stability against temperature change
- Single operative voltage 3V



Outline

EM-3241 outputs analog signal proportional to angular position of magnet using signal from Hall sensors and the signal's processing. The combination EM-3241 with coin shape magnet realizes non contact angular position sensing features. Very wide variety of magnets can be used for the measurement, and very stable output without any significant error can be available even if the magnet has some temperature dependency.

Block diagram

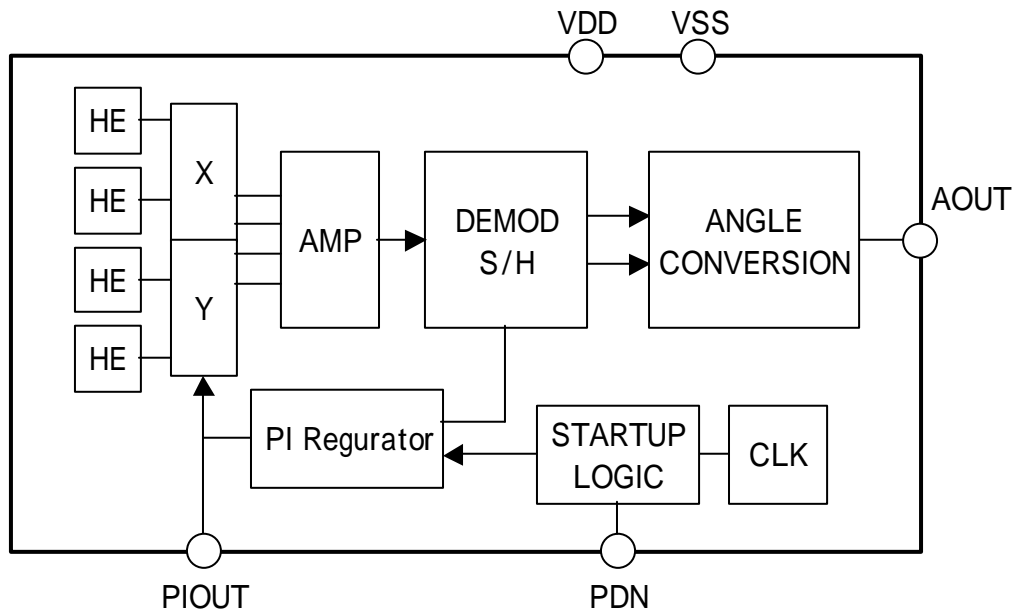

Absolute maximum rating


Symbol	Parameters	Min.	Typ.	Max.	Unit	Remarks
V_{SUP}	Supply voltage	0		6	V	
T_S	Storage temperature	-40		125	°C	

Recommended operating condition

Symbol	Parameters	Min.	Typ.	Max.	Unit	Remarks
V_{CC}	Supply Voltage	2.7	3	3.3	V	
T_A	Operating Temperature	-30		85	°C	


Electric & Magnetic characteristics

Symbol	Parameters	Min.	Typ.	Max.	Unit	Remarks
B_{RANGE}	Detective Magnetic Range	11	15	19	mT	
A_{RANGE}	Detective angle range			360	Deg.	
A_{PREC}	Angle preciseness	-5	0	5	Deg.	@25°C
A_{TD}	Angle Temperature Drift	-1	0	1	Deg.	@-30 ~ 85°C
BBW	Max. Rotation Speed			200	Hz	
	Output Cycle		50		KHz	
T_d	Output signal delay		30		μs	
V_{OUT}	Output Voltage range	0.1VDD		0.9VDD	V	Ratio metric
I_{SUP}	Supply Current		9.0		mA	w/ sensor drive
I_{PD}			1.0		μA	Power-down
T_{PD}	Wake-up time	400	500	800	μs	PDN:L H
I_{OUT}	Output current			0.3	mA	
CL	Load capacitance			500	pF	

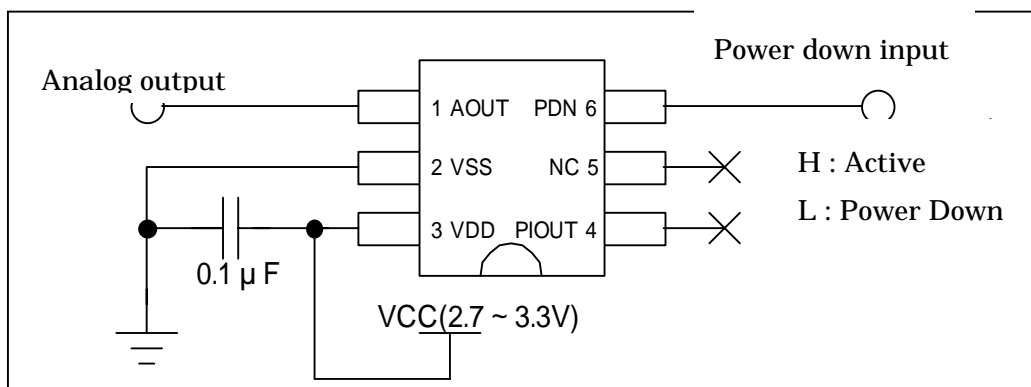
Recommended Connection Diagram

Absolute angle position & Magnet Position

Analog output increases with clockwise magnet rotation.

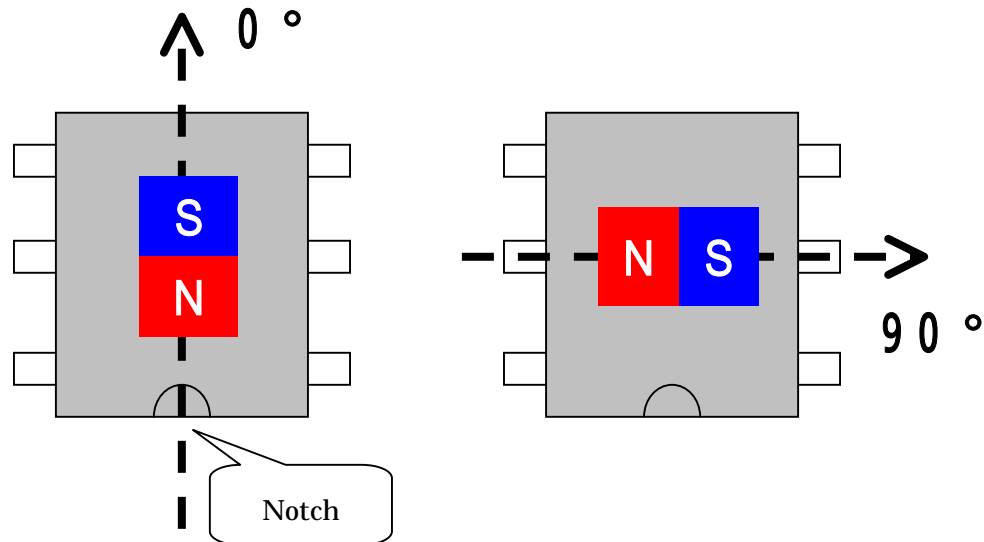


Timing chart for output

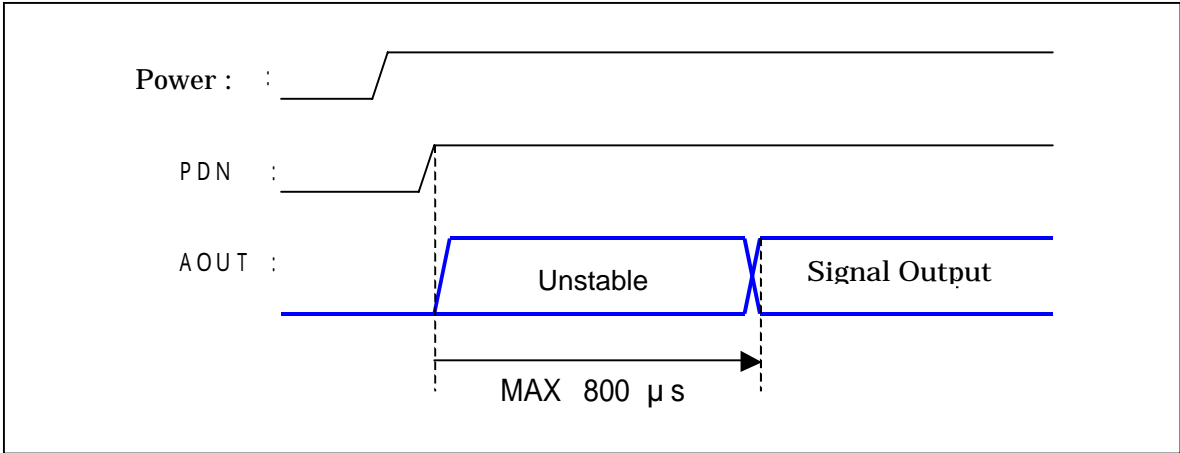


Please note there is “output unstable state” before actual signal outputs when the state is change from “Power Down” to “Active.”

Magnetic Field Optimization

Output voltage from “PIOUT” pin can be used to monitor magnetic field condition against which the IC functions. Peak value of “PIOUT” will be 60-70% of supply voltage(VDD) when the target magnetic field is optimized.

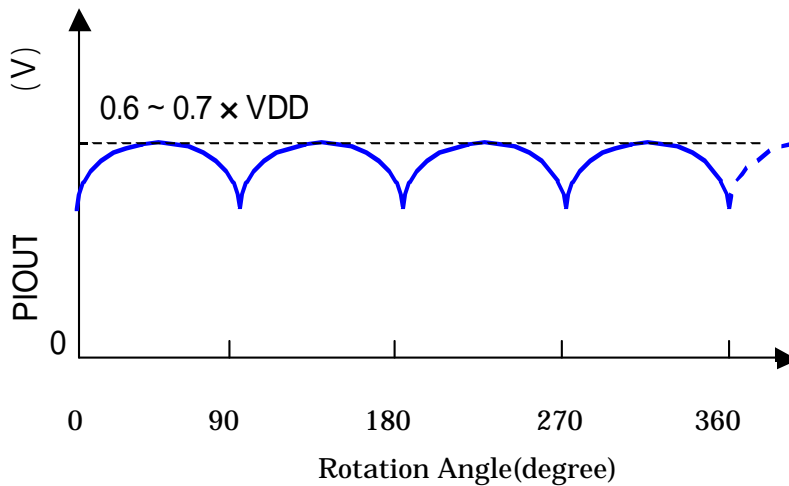

<i>Package</i>

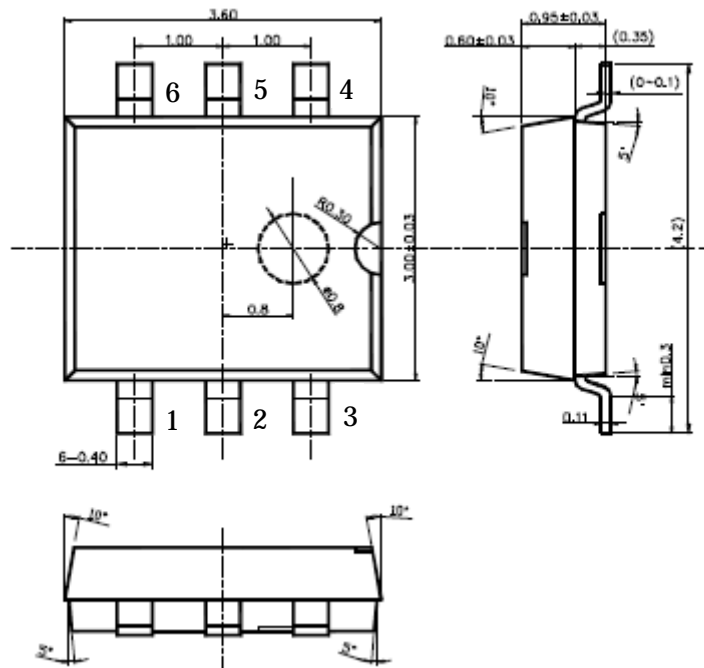

Pin No.	Name	Comments
1	AOUT	Sensor output
2	VSS	Ground pin. A ceramic capacitor (0.1μF) should be connected between VDD and VSS.
3	VDD	Power supply. Please see above "VSS" for capacitor attach.
4	PIOUT	PI output. Output voltage monitoring when magnetic strength is confirmed. Normally no connection(open).
5	NC	No connection(open)
6	PDN	Power down. PDN=Logic High(3V)→ IC active. Internally being pulled down and power-down state kept when reset(power on).

<i>Important Notice</i>

The information presented in this document has been carefully checked and is believed to be accurate, however, no responsibility is assumed for inaccuracies. Asahi Kasei EMD reserves the right to make changes to any specifications without further notice for performance, reliability, production technique and other considerations, Asahi Kasei EMD does not assume any liability arising out of the application or use of products herein.

Asahi Kasei EMD makes no warranty that the use of the innovative technology will not infringe on patent rights or other proprietary rights owned by others.